

Safety has never been so beautiful
Ditec Style

EN

Automatic residential sectional overhead doors

Entrematic
Via Mons. Banfi, 3 · 21042 Caronno P.lla (VA) · Italy
Tel +39 02 963911 · Fax +39 02 9650314
ditec@entrematic.com
www.ditecentrematic.com www.entrematic.com

ISO 9001
Cert. n. 0957

Present in: Belgium, France, Germany, Portugal, Spain, Sweden, Switzerland, Turkey, Latin America, USA, Canada and China.
For addresses and contact information see our website **www.ditecentrematic.com**

Cod. S200B - 12/2012
Automatic residential sectional overhead doors Ditec Style.

www.ditecentrematic.com



Ditec Style
The difference between a door and a welcome home

It's always a pleasure to return home. We can finally leave a hard day behind us and enjoy what really matters: our family and friends, our interests and pastimes, and the wellbeing of our home. The garage door symbolises all of this: it's the entrance to the world we love. That is why it has to be special.

The Ditec Style sectional overhead doors are the right choice for those looking for security combined with elegance and aesthetic refinement. They offer style, comfort and energy savings, in addition to the most advanced anti-intruder systems, guaranteed by the EC marking.

They open vertically, sliding upward and then along the ceiling, making them ideal when space is at a premium, or when the garage opens directly onto the pavement.

Enter the world of Ditec Style: come into your home.



96 possible solutions
No matter what type of home you have, you will find a solution that meets your taste and style. In fact, Ditec Style doors let you choose from 96 different combinations of models, designs and colour. A wide range of features, modern or more traditional, which you can "mix and match" to get your ideal door



High security
Your garage door should guarantee the highest level of security possible, not just against external attack, but also against daily mishaps. Ditec Style doors are equipped with a anti-crush system, special panels without cracks, and a door blade lock in the event the door fails or meets an obstacle while closing.
Ditec Style Comfort has passed the tests required by sector standard NEN 5096 with flying colours and obtained Resistance Class 2 certification.



Perfect insulation
The Ditec Style panels are 42 mm thick. A panel that thick guarantees not only greater stability but also high thermal insulation (transmittal thermal coefficient up to 1.3 W/m^{2}K). Wind, rain, heat, cold: everything stays outside your garage door.



Accessorised
Ditec Style has various command, control and safety accessories such as transmitters complete with support, IR photocells, key selector and digital keypad systems.



Made to measure
Ditec Style gives you a door with maximum customisation: paintwork in any RAL colour; a wide range of windows and portholes colour coded to match the panel; rear positioning of the springs. The choice is yours.



Technology and comfort
Thanks to the innovative automation control system, all it takes is the press of a button to activate your garage door remotely - quickly and quietly. Attention to detail ensures high quality installations and high comfort: no noise and perfect thermal insulation, in addition to safety, security and aesthetics. Simply by pressing another key on the same remote control, you can also operate your home's Ditec automatic gate.



With more panel personalisation, returning home will be even more pleasant

Ditec Style Comfort is available in 5 different panel models, 3 designs and lots of colours, with the option of being painted in an RAL colour: 96 different combinations so you can have your door truly made to measure. But that's not all: it can be enhanced with windows, pedestrian doors, portholes and ventilation grilles, complete with frames in the same colour.

External side

MODELS



LINEA - Multi | LINEA - Med | LINEA - Top | FLAT | CASSETTE

FINISHES

CORTEX Design

PLAIN Design

TEKNO Design

COLOURS

CORTEX Design	PLAIN Design	TEKNO Design
White RAL 9016	White RAL 9016	White RAL 9016
Brown RAL 8014	Light grey RAL 7035	Brown RAL 8014
Anthracite grey RAL 7016	Anthracite grey RAL 7016	Anthracite grey RAL 7016
Silver RAL 9006	Silver RAL 9006	Silver RAL 9006
Teak	Signal grey RAL 7004	
Nogal	Grey aluminium RAL 9007	
	* Grey metallic	
	* Teak	
	* Nogal	
	* Morado	

* Not available for CASSETTE model

All RAL colours on request

Internal side


MODEL	FINISH	COLOUR
		
LINEA - Micro	**TEKNO Design**	**White RAL 9016**

A refined and technological style

If you like geometric lines and modern colours, get inspired by these combinations of style: they are just some examples of customisation of your Ditec Style Comfort.



LINEA - Multi White RAL 9016

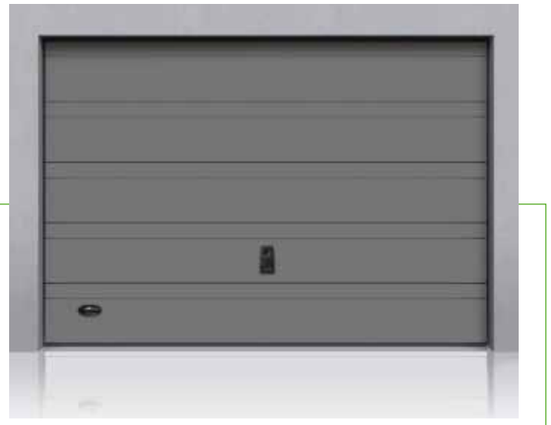

LINEA - Top Grey metallic



LINEA - Med Anthracite grey RAL 7016



FLAT Grey aluminium RAL 9007



CASSETTE Signal grey RAL 7004



CASSETTE Brown RAL 8014

A warm and welcoming style

Do you prefer a design with wood tones, which never gets old? You can get some ideas from these combinations of panels and colours.Ditec Style Comfort has fully 96.



LINEA - Multi Teak



LINEA - Top Nogal



LINEA - Med Morado



FLAT Teak



CASSETTE Nogal



CASSETTE Teak

COMFORTABLE

The characteristics which make it truly comfortable

Automatic
The remote control opening system lets you activate your Ditec Style remotely. So you never have to worry about the cold, rain or heavy loads to carry: you can stay in the comfort of your car. In addition, use the remote control to turn on the inside light, lighting up the garage before you enter. You can program the same remote control to open and close your home automatic gate.



Thermally insulated
The panels, 42 mm thick, make the door even more solid and guarantee excellent thermal insulation, guaranteed by the system of seals along the edges. What's more, the lower seal has ventilation openings.






Quiet
Thanks to its quiet and high performance motor, the door activates without making noise; the steel guide, on which the ball rollers slide, allowing the individual sections of the door to be raised or lowered, guarantees fluid movement and quiet operation. The weight distribution is spread over 4 self-aligning sliding wheels making the movement even more fluid, mitigating friction and therefore wear and noise.





Practical
Opening is perpendicular to the ground, it does not swing: this means the door slides up then along the ceiling: it takes up less space and adapts to any space requirements. This system avoids you having to reverse the car while the door opens and provides easy access even for larger cars.

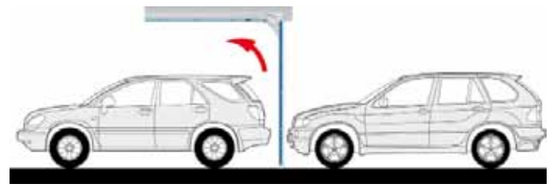

SAFETY & SECURITY

More safety & security: for you, your family, your home

Security against intruders
The Ditec Style Comfort model comes equipped with an advanced anti-intrusion device (TOP option), effective enough to have obtained Resistance Class 2 certification in accordance with the criteria established by reference standard NEN 5096.



Safety in case of impact
The lower edge of the Ditec Style Comfort door is equipped with a special, calibrated hardness seal which reverses the movement of the door blade when it senses an obstacle or a person.
The same seal contributes to the thermal insulation whilst allowing an efficient change of air, thanks to the ventilation grilles.



Safety for people
The side hinges are galvanized and come complete with finger protection. The design of the panels, regular and uniform, prevents cracks from forming between them, making the doors safe even for children.



Break-proof spring safety
The torsion spring, with a break-proof safety device, increases operating ease and makes using the door even safer. In fact, the mechanism prevents the door from closing accidentally and guarantees an additional support and seal.



Ditec Style Comfort

Elegance to be experienced every day

The Ditec Style Comfort garage door offers you everything and more. Unbeatable aesthetics, with 96 different combinations, leave space for your creativity and any style demands, enhancing the lines and colours of your home. Equipped with the most advanced safety and insulation technologies, enhance your Ditec Style Comfort door by choosing from a vast range of accessories. This door's name itself carries with it the guarantee of a new, better quality of life. Yours.



Ditec Style Comfort
A unique door that adapts to you

Special - inside and out
The innovative design, aesthetics that can be personalised and a wide choice of accessories make this door truly special. The wide range of styles and colours lets you adapt it to your house, while the cutting-edge technology of its mechanisms and accessories guarantees maximum ease and safety. Discover it up close and choose the features that best meet your needs.




- Uniform height panels, modular, with LINEA (Multi, Med, Top), FLAT or CASSETTE patterns
- 96 possible combinations of models, designs and colours
- Made to measure ≤ 5500 x PH 3150 mm
- 42 mm thick panels
- Panels with finger protection
- Galvanized steel sliding guides and intermediate hinges
- Adjustable side hinges with self-aligning sliding wheels
- Balancing springs tested to 20,000 cycles, can also be positioned on the rear part
- Obstacle detection technology with calibrated hardness seal
- Manual release device with ergonomic handle, optional
- Option of windows, pedestrian doors, portholes and ventilation grilles with frames
- Heavy-duty rear template
- Super-click rapid installation system
- Equipped with Ditec Globe 7 or Ditec Globe 10 motors

TOP Option
- Thermal break vertical seals on frames and horizontal on the lintel
- Anti-intrusion device with Resistance Class RC2 certification
- Plastic cover on lower support and side rollers

Discover the advantages that you won't be able to deny

Maximum choice of model options
Your garage door should not only be efficient and safe, it should be great to look at and it should match the rest of your house. Because of this Ditec Style Comfort can be customized in 96 different combinations of model, design and colour, with the option of being able to add windows, pedestrian doors, portholes and ventilation grilles.





Anti-intrusion RC2
Security is always first: that is why the Ditec Style Comfort doors can be equipped with an advanced anti-intrusion device, protecting you from thieves and attempted break-ins. The quality of this security system is certified as Resistance Class 2 based on the Dutch standard NEN 5096.



Complete thermal insulation
You will never need to fear piercing cold or stifling heat: with its 42 mm thick panels, your new sectional overhead door guarantees perfect thermal insulation.



High performance
Ditec Style Comfort is equipped with cutting-edge motors that provide safety, versatility and harmonious design. Furnished with various accessories, Globe motors also ensure significant energy savings.
The hardware components, like the springs, reinforced guides and brackets are also optimised down to the smallest detail to provide excellent performance.



SIMPLE

Ditec Style Basic

Simplicity never goes out of fashion


Essential style
Ditec Style Basic offers 6 different standard sizes, in uniform height and with modular panels, but is also available in custom sizes up to 3000 x PH 2250 mm. The horizontal slat patterns, simple and refined, give this door an unmistakable style, a simple and refined design, which suits the most modern home, as well as the most traditional.
Ditec Style Basic will soon become "one of the family": an essential element that which will never age.



- Uniform height panels, modular, with LINEA-Multi horizontal slats
- Finish in white, CORTEX design
- Available in 6 standard sizes, or made to measure ≤ 3000 x PH 2250 mm
- 42 mm thick panels
- Panels with finger protection
- Galvanized steel sliding guides and intermediate hinges
- Adjustable side hinges
- Perimeter seal
- Balancing springs tested to 15,000 cycles
- Obstacle detection technology with calibrated hardness seal
- Optional manual release (with release handle or cord-operated release)
- Equipped with Ditec Globe 6 motor

Ditec Style
Overall dimensions


Ditec Style Comfort

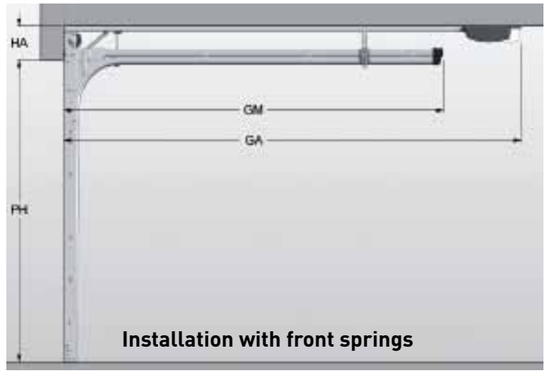

Installation with front springs

Made to measure
Maximum length: 5500 mm
Maximum height: 3150 mm


PL up to	PH up to	HA	GM	GA
3000	2500	160	PH+640	3900
3000	3150	190	PH+640	4740
5500	2500	190	PH+640	3900
5500	3150	190	PH+640	4740

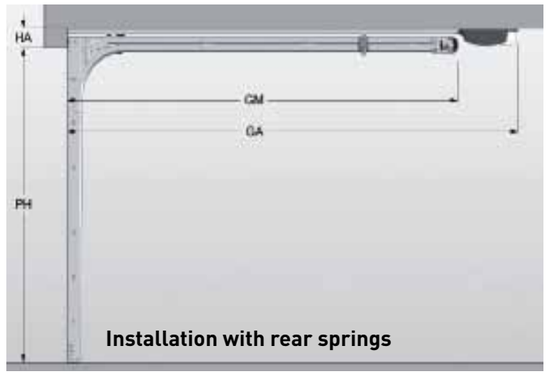

Installation with rear springs

PL up to	PH up to	HA		GM	GA
3000	2500	90	130	PH+765	3900
3000	3150	90	130	PH+765	4740
5500	2500	90	130	PH+765	3900
5500	3150	90	130	PH+765	4740

Ditec Style Basic

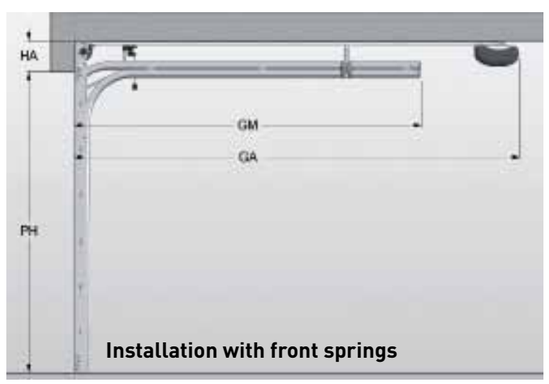


Installation with front springs

Standard measurements
2375 x PH 2000 mm
2375 x PH 2125 mm
2400 x PH 2000 mm
2400 x PH 2125 mm
2500 x PH 2000 mm
2500 x PH 2125 mm

Made to measure
Maximum length: 3000 mm
Maximum height: 2250 mm

PL up to	PH up to	HA	GM	GA
3000	2250	190	PH+640	3300

Ditec Style
Outfitting characteristics

		Ditec Style Comfort	Ditec Style Basic
Safety seal with ventilation system The lower seal is equipped with a safety profile which senses obstacles and immediately stops the door from closing. Furthermore, it provides protection against rain, wind and snow, in addition to allowing air circulation thanks to closable air vents.		■	■
Thermal insulation seals around perimeter The vertical high thermal insulation seals on the vertical frames and horizontal on the lintel insulate the mechanics from the perimeter wall, preventing a thermal bridge due to its contact with them and help insulate the environment.		■ TOP option	–
Anti-intrusion system The locking system at floor level of the Ditec Style doors, certified as Resistance Class 2, prevents thieves from entering by physical force or by using the most common equipment for breaking in. Base plate made in stainless steel.		■ TOP option	–
Cover for lower protection support In order to guarantee total security, the lower bracket has a plastic cover which in additional to being aesthetically attractive, prevents children from getting hurt when playing near the door.		■ TOP option	–
Galvanized, self-aligning side rollers The side hinges are corrosion-proof and come complete with finger protection.		■ TOP option	–
Galvanized steel guides with side reinforcement plates The galvanized steel guides are joined by a double curve in order to guarantee resistance and quiet operation. The steel reinforcing in the curve protects the upper sliding wheels from any attempts at tampering. RAL 9016 painting optional.		■	–
Galvanized steel guides The galvanized steel guides are joined by a double curve in order to guarantee resistance and quiet operation.		–	■

Ditec Style
Outfitting characteristics

		Ditec Style Comfort	Ditec Style Basic
Pairs of reinforced brackets for guides supports Ditec Style Comfort has reinforced brackets for greater efficiency and safety.		■	–
Pairs of brackets for guide supports Optimised brackets to secure the door perfectly to the ceiling.		–	■
Rear template with plastic supports The template guarantees that the horizontal guides are mounted with precision: a guide is installed and then the template is used to identify the correct position of the other without the need to use any particular measuring instruments.		■	–
Torsion springs tested to 20,000 cycles The torsion springs increase operating ease and makes using the door even safer. Tested to 20,000 cycles.		■	–
Torsion springs tested to 15,000 cycles The torsion springs increase operating ease and makes using the door even safer. Tested to 15,000 cycles		–	■
Position of the torsion springs: front or rear The torsion springs can also be fitted on the rear, making installation possible even with a very low lintel.		■	–
Position of the torsion springs: front The Ditec Style Basic model has torsion springs only in the front position.		–	■

Ditec Style
Outfitting characteristics

		Ditec Style Comfort	Ditec Style Basic
Super-click system The super-click system allows the entire torsion unit to be fitted to the lintel with a single, simple operation which can even be performed by one person, reducing work time and the number of workers you have in your home.		■	■
Spring break-proof device Thanks to the break-proof device, the torsion springs can increase ease of operation in an even safer way.		■	■
Handle with emergency release With the new ergonomically shaped handles you have comfort, functionality and safety: all in the palm of your hand. The door can be opened and closed with maximum simplicity and complete safety. The European type cylinder is protected in the lock housing.		■	■
Lifting handle The practical lifting handle lets you open the door manually when necessary, when there is an electricity blackout, for example.		■	■
Ditec Globe 7 or Ditec Globe 10 motor Both motor models have a heavy duty cogged belt, which ensures almost completely quiet dragging, no need to add oil nor grease and therefore it's highly resistant to tears.		■	–
Ditec Globe 6 motor Ditec Style Basic is equipped with a Ditec Globe 6 drive system. Practical, safe and silent, this motor provides ideal power to conveniently operate your sectional overhead doors.		–	■
Window panel and pedestrian door Windows and pedestrian doors add a designer's touch as well as brightness to your garage and make it truly original.		■	–

The accessories that make all the difference

Available for Ditec Style Comfort



Round and oval portholes
A curvilinear element that adds elegance to the door with soft and delicate shapes.





In satin finish acrylic, available in a wide range of external frames.

Square portholes
Classic geometry to enhance the outside of your garage..





In satin finish acrylic, available in a wide range of external frames.

Rectangular portholes
Essential lines, perfect for modern design architecture.



In satin finish acrylic, available in a wide range of external frames.

Windows
Original and refined patterns to make the design of your Ditec Style Comfort even more creative.





In transparent or satin finish acrylic, with external frame painted to match the panel.

Decorative windows
The ideal solution for those who love light and are looking for something truly special for their home.



In satin finish acrylic, **with external frame painted to match the panel.**

Ventilation grilles
For a more ventilated and open environment, Ditec Style Comfort ventilation grilles are the right accessory.





The frame can be personalised. Choose from the available colours.

Pedestrian doors
Ditec Style Comfort provides you with the option of inserting pedestrian doors with the shapes and colours of your sectional overhead doors; if inserted in the facing, the threshold is lowered.





Control and security are in your hands

Gol 4
Remote controls
Simply press a button on the remote control and the Ditec drive system springs into action. Thanks to this accessory, foul weather will never be a problem again.





Caddies for
Gol 4 remote controls
These can be positioned on any surface or on your car sun visor so you'll always have your remote control within easy reach.





Gol 4M
Keypad transmitter
Four-channel encoded radio command - open by entering the code.





Lab 3
IR photocells
For a maximum level of safety in automation.
Can be wall or vertical mounted.





Xel 5
Key switch
With anti-break-in, anti-vandalism device.





Lan 4
Digital keypad systems
With digital, anti-vandalism combination and secret code up to 8 digits.





Available for Ditec Style Comfort and Style Basic

